



18 MM PET-VILT

DIRECT OP DE GROND EN INCL. ISOLATIEMATERIAAL



18 MM PET-VILT				
Totale dike [mm]	18	38	48	63
Dikte van isolatiemateriaal	-	20	30	45
Dikte van paneel [mm]	18	18	18	18
Frequentie	α_s	α_s	α_s	α_s
100	0.03	0.11	0.14	0.23
125	0.04	0.14	0.20	0.28
160	0.06	0.25	0.33	0.52
200	0.08	0.39	0.53	0.89
250	0.12	0.51	0.73	1.03
315	0.19	0.66	0.82	1.12
400	0.28	0.86	1.03	1.27
500	0.37	0.93	1.12	1.23
630	0.52	1.03	1.14	1.21
800	0.68	1.11	1.16	1.20
1000	0.70	1.09	1.10	1.17
1250	0.75	1.14	1.04	1.18
1600	0.81	1.03	1.02	1.12
2000	0.83	1.02	1.04	1.10
2500	0.89	1.03	1.02	1.08
3150	0.99	1.00	1.04	1.03
4000	1.00	1.04	1.05	1.06
5000	1.02	1.01	1.06	1.03

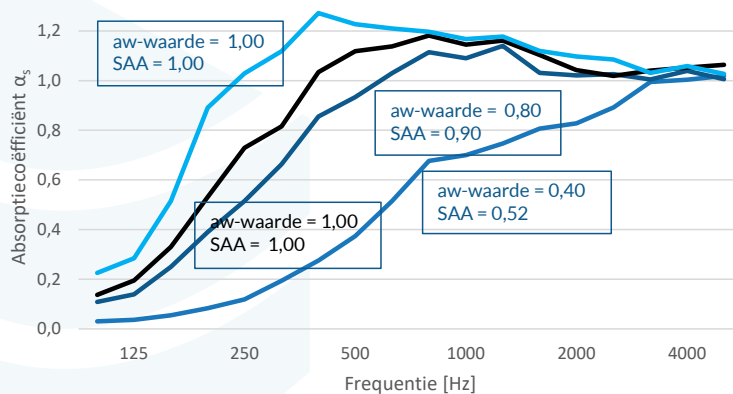

Frequentie	α_p	α_p	α_p	α_p
125	0.05	0.15	0.20	0.35
250	0.15	0.50	0.70	1.00
500	0.40	0.95	1.00	1.00
1000	0.70	1.00	1.00	1.00
2000	0.85	1.00	1.00	1.00
4000	1.00	1.00	1.00	1.00

NRC	0.55	0.90	1.00	1.00
SAA	0.52	0.90	1.00	1.00
α_w	0.40	0.80	1.00	1.00
Absorptie klasse	D	B	A	A