



# 25 MM PET-VILT

DIRECT OP DE GROND EN INCL. ISOLATIEMATERIAAL



25 MM PET-VILT			
Totale dike [mm]	25	55	70
Dikte van isolatiemateriaal	-	20	45
Dikte van paneel [mm]	25	25	25
Frequentie	$\alpha_s$	$\alpha_s$	$\alpha_s$
100	0.05	0.09	0.21
125	0.06	0.16	0.30
160	0.09	0.25	0.52
200	0.14	0.35	0.65
250	0.19	0.50	0.86
315	0.29	0.69	1.06
400	0.43	0.84	1.11
500	0.53	0.98	1.14
630	0.68	1.08	1.15
800	0.75	1.10	1.13
1000	0.85	1.20	1.18
1250	0.93	1.14	1.16
1600	0.99	1.16	1.14
2000	1.03	1.13	1.09
2500	1.00	1.07	1.07
3150	1.01	1.07	1.10
4000	1.02	1.12	1.09
5000	0.96	1.05	1.05

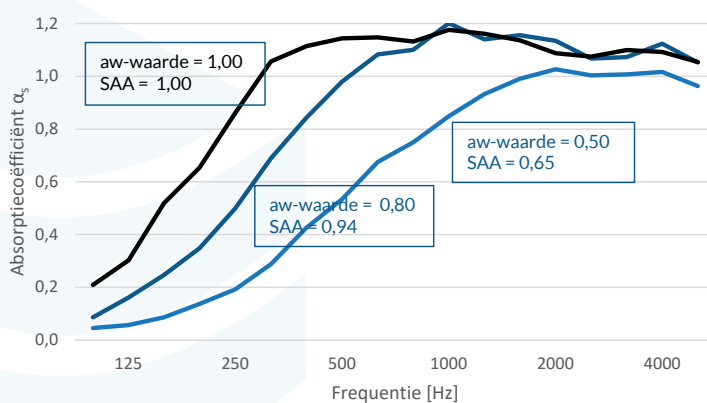

- 25 MM PET-VILT
- 25 MM PET-VILT + 20 MM MÉTISSE
- 25 MM PET-VILT + 45 MM MÉTISSE

Frequentie	$\alpha_p$	$\alpha_p$	$\alpha_p$
125	0.05	0.15	0.35
250	0.20	0.50	0.85
500	0.55	0.95	1.15
1000	0.85	1.15	1.15
2000	1.00	1.10	1.10
4000	1.00	1.10	1.10

NRC	0.65	0.95	1.00
SAA	0.65	0.94	1.00
$\alpha_w$	0.50	0.80	1.00
Absorptie klasse	D	B	A