


# Topakustik Perfo T

## 16/16/10-4

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions



formerly: TOPPERFO-T 16/16/10-4

Developed and successfully used by Topakustik, the T-Perforation has a discreet effect while still offering high-performance absorption. Topakustik Perfo T is available with perforation bores of 3, 4 and 5 mm. The smaller the visible perforations, the more the maximum absorption shifts to the lower frequency.



### Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

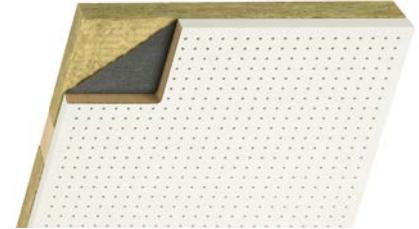

#### Normally flammable D-s2,d0 / CH RF 3



Painted  
16 mm



Real wood  
veneer 17 mm



Melamine  
16 mm

#### Flame retardant B-s1,d0 / CH RF 2



Painted  
16 mm



Real wood  
veneer 17 mm



Melamine  
16 mm

#### RESAP® core panel, non-combustible



Painted  
16 mm



Real wood  
veneer 17 mm

maximal

3648 × 1216	3648 × 1216	3648 × 1216	3648 × 1216	3648 × 1216	3648 × 1216	3080 × 1216	3080 × 1216
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------


ideal = means optimal use of MDF core – custom lengths are also available

2032 × 992	2032 × 992	2032 × 992	2032 × 992	2032 × 992	2032 × 992	1540 × 608	1540 × 608
------------	------------	------------	------------	------------	------------	------------	------------


2780 × 992	2780 × 992	2780 × 992	2780 × 992	2780 × 992	2780 × 992	3080 × 608	3080 × 608
------------	------------	------------	------------	------------	------------	------------	------------

3648 × 640	3648 × 640			3640 × 640			
------------	------------	--	--	------------	--	--	--


#### 16/16/10-4




### Edges



Clean cut




With surrounding tongue  
and groove



Visible edge

... or according to  
your specifications

### Mounting



Topakustik Perfo T,  
Ø 4 mm  
Special screws  
Blind Series

### Sound absorption data acc. to ISO 354

#### Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m<sup>3</sup>)



See installation manual!